



EUROPA BATTERIES

ZI Rue Marc SANGNIER
45300 PITHIVIERS

☎: +33 (0) 238 300 080

☎: +33 (0) 238 300 480

🌐: www.europa-batteries.com

Primary lithium batteries ER17335M

**3.6V Primary lithium-thionyl chloride
(Li-SOCl₂) Power type
A-size spiral cell**

For high drain/high pulses applications requesting superior voltage response in -55°C~+85°C environments.

Cell size references	(2/3 A)
Alternative models	2/3A
Electrical characteristics (typical values relative to cells stored for one year or less at +30°C max.)	
Nominal capacity (at 5 mA +20°C 2.0V cut off. The capacity restored by the cell varies according to current drain, temperature and cut off).	1.7Ah
Open circuit voltage (at +20°C)	3.66V
Nominal voltage (at 5mA +20°C)	3.6V
Pulse capability: Typically up to 1000 mA (1000 mA/0.1 second pulses, drained every 2 mn at +20°C from undischarged cells with 10 µA base current, yield voltage readings above 3.0V. The readings may vary according to the pulse characteristics, the temperature, and the cell's previous history. Fitting the cell with a capacitor may be recommended in severe conditions. Consult ABLE)	
Max. Continuous current	500mA
Max. Pulse current	1000mA
Storage (recommended) (for more severe conditions, consult EUROPA)	+30°C (+86°F) max
Operating temperature range (Operation above ambient T may lead to reduced capacity and lower voltage readings at the beginning of pulses. Consult EUROPA)	-55°C / +85°C
Physical characteristics	
Diameter (max)	17.5mm(0.67 in)
Height (max)	33.5mm(0.6 in)
Typical weight	19g(0.6oz)
Available termination suffix	radial tabs, radial pins, axial leads, flying leads

EUROPA BATTERIES


ZI Rue Marc SANGNIER
45300 PITHIVIERS

☎: +33 (0) 238 300 080

☎: +33 (0) 238 300 480

🌐: www.europa-batteries.com

ER17335M

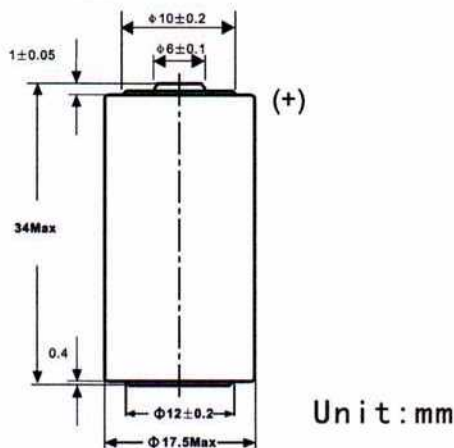

Key features

- ▶ High and stable operating voltage
- ▶ Superior drain capability
- ▶ Low self-discharge rate (less than 1% after 1 year of storage at +20°C)
- ▶ Optional stainless steel container for low magnetic and nickel plated steel container for more safe design
- ▶ Hermetic glass-to-metal sealing
- ▶ Notch technology for safety vent
- ▶ Non-flammable electrolyte
- ▶ Finished product with PTC to avoid short-circuit

Main applications

- ▶ Radiocommunication and other military applications
- ▶ Alarms and security systems
- ▶ Beacons and emergency location transmitters
- ▶ GPS
- ▶ Metering systems
- ▶ Sonobuoys
- ▶ LED lighting applications
- ▶ Others

Storage


- ▶ The storage area should be clean, cool (not exceeding +30°C), dry and ventilated.

Warning


- ▶ Do not use if the battery casing was mangled.
- ▶ Please discharge the battery few minutes with 100mA, if the battery voltage is lower than your need or consult.
- ▶ Don't use different models of battery in series.
- ▶ Soldering the tag should be finished in few seconds.
- ▶ Do not try to recharge.

■ Characteristic curves

Discharge performance (25°C)

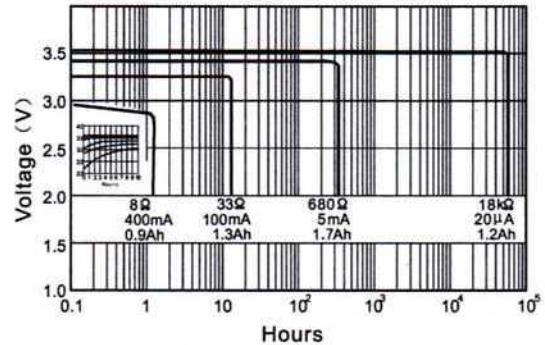

Capacity VS Current

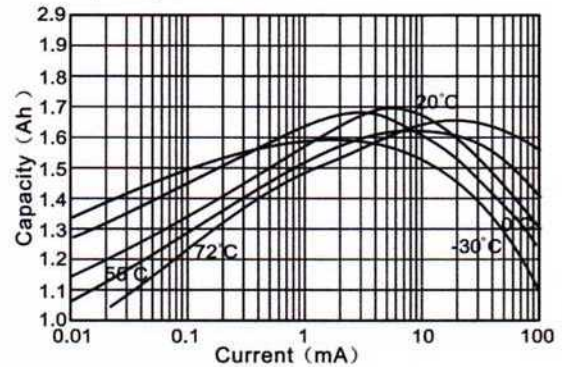

Voltage VS Temperature

