



EUROPA BATTERIES

ZI Rue Marc SANGNIER
45300 PITHIVIERS

☎: +33 (0) 238 300 080

☎: +33 (0) 238 300 480

🌐: www.europa-batteries.com

Primary lithium batteries ER34615M

**3.6V Primary lithium-thionyl chloride
(Li-SOCl₂) Power type
D-size spiral cell**

For high drain/high pulses applications requesting superior voltage response in -55°C~+85°C environments.

Cell size references

(UM1 - R20 - D)

Alternative models

LSH20/TL2300/SW-D02

Electrical characteristics

(typical values relative to cells stored for one year or less at +30°C max.)

Nominal capacity (at 10mA +20°C 2.0V cut off. The capacity restored by the cell varies according to current drain, temperature and cut off).	14.5Ah
---	--------

Open circuit voltage (at +20°C)	3.66V
---------------------------------	-------

Nominal voltage (at 10mA +20°C)	3.6V
---------------------------------	------

Pulse capability: Typically up to 400 mA (400 mA/0.1 second pulses drained every 2 mn at +20°C from undischarged cells with 10 µA base current, yield voltage readings above 3.0V. The readings may vary according to the pulse characteristics, the temperature, and the cell' s previous history. Fitting the cell with a capacitor may be recommended in severe conditions. Consult ABLE)

Max. Continuous current	2000mA
Max. Pulse current	3000mA

Storage (recommended) (for more severe conditions, consult EUROPA)	+30°C (+86°F) max
---	-------------------

Operating temperature range (Operation above ambient T may lead to reduced capacity and lower voltage readings at the beginning of pulses. Consult EUROPA)	-55°C / +85°C
---	---------------

Physical characteristics

Diameter (max)	34mm(1.41 in)
----------------	---------------

Height (max)	61.5mm(2.44 in)
--------------	-----------------

Typical weight	107g(3.5 oz)
----------------	--------------

Available termination suffix	radial tabs, radial pins, axial leads, flying leads
------------------------------	---



**EUROPA
BATTERIES**

EUROPA BATTERIES


ZI Rue Marc SANGNIER
45300 PITHIVIERS

☎: +33 (0) 238 300 080

☎: +33 (0) 238 300 480

🌐: www.europa-batteries.com

ER34615M

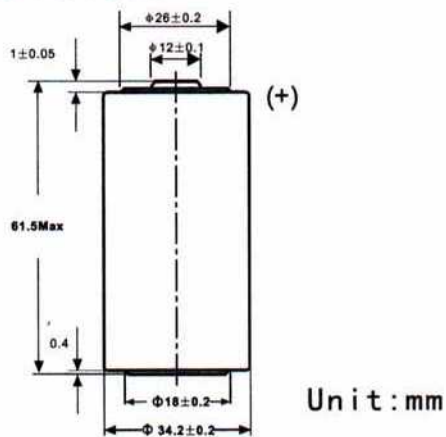

Key features

- ▶ High and stable operating voltage
- ▶ Superior drain capability
- ▶ Low self-discharge rate (less than 1% after 1 year of storage at +20°C)
- ▶ Optional stainless steel container for low magnetic and nickel plated steel container for more safe design
- ▶ Hermetic glass-to-metal sealing
- ▶ Notch technology for safety vent
- ▶ Non-flammable electrolyte
- ▶ Finished product with PTC to avoid short-circuit

Main applications

- ▶ Radiocommunication and other military applications
- ▶ Alarms and security systems
- ▶ Beacons and emergency location transmitters
- ▶ GPS
- ▶ Metering systems
- ▶ Sonobuoys
- ▶ LED lighting applications
- ▶ Others

Storage

- ▶ The storage area should be clean, cool (not exceeding +30°C), dry and ventilated.

Warning

- ▶ Do not use if the battery casing was mangled.
- ▶ Please discharge the battery few minutes with 100mA, if the battery voltage is lower than your need or consu
- ▶ Don't use different models of battery in series.
- ▶ Soldering the tag should be finished in few seconds.
- ▶ Do not try to recharge.

Characteristic curves

