


SPECIFICATIONS

(Typical values stored at 20 °C for one year)

▪ Nominal capacity (at 5mA/20°C/68°F/2.0V cut-off)	17.0Ah
▪ Nominal voltage (OCV)	3.6V
▪ Max. recommended continuous current (Higher current can be available upon consulting)	230mA
▪ Operating temperature range	-55 ~+125 °C
▪ Lithium metal content	approx. 4.8g
▪ Weight	95g
▪ Volume	51.0cm³
▪ UL Approval	MH28122

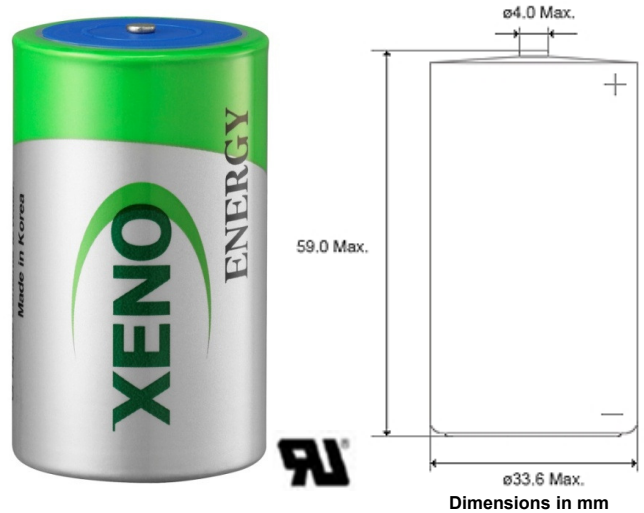


Available Terminal Type

STD, T1, AX, Wire, Connector Type


Storage Condition

Please store batteries at clean, cool (not over +30 °C), dried (less than 30% RH) and ventilated condition

Discharge Characteristics at +20 °C

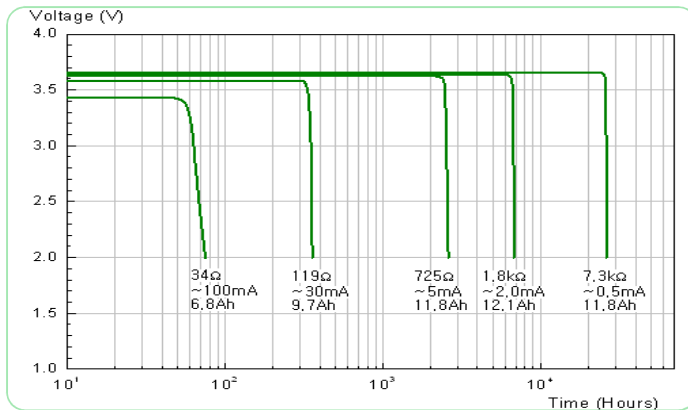

Capacity versus Current

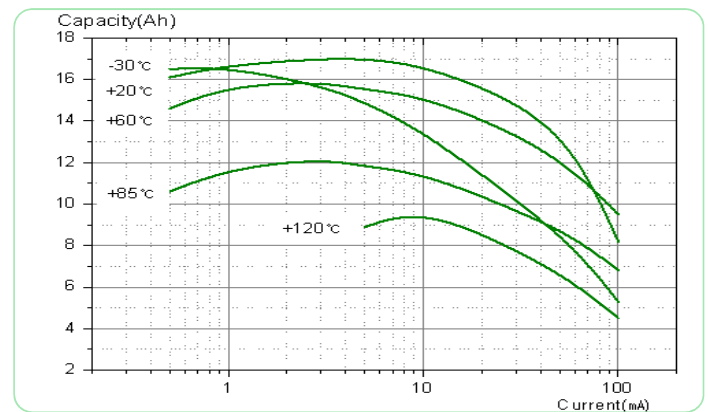

Operating Voltage

